

# SIV SERIES

Small Changes, Big Accomplishments







## 535-550W



### ● SIV SERIES

Seraphim redefined the high-efficiency module series by integrating 182mm silicon wafers with multi-busbar and half-cut cell technologies. Seraphim panel combined creative technology effectively and extremely improved the module efficiency and power output.

### ● KEY FEATURES

-  Less mismatch to get more power
-  Less power loss by minimizing the shading impact
-  Competitive low light performance
-  3 times EL test to ensure best quality
-  Ideal choice for utility and commercial scale projects by reduced BoS and improved ROI
-  Outstanding reliability proven by PVEL for stringent environment condition:
  - Sand, acid, salt and hail stones
  - 2400 Pa wind load and 5400 Pa snow load
  - Anti-PID

### ● QUALITY SYSTEM

ISO9001 / ISO14001 / ISO45001


### ● PRODUCT CERTIFICATION



### ● INSURANCE

**PICC**

### ● WARRANTY

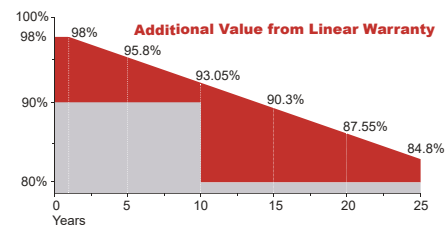

Guarantee on product material and workmanship



Linear power output warranty





**JIANGSU SERAPHIM SOLAR SYSTEM CO., LTD**

Add: No.10, TongshunRd, HenglinTown, Wujin District, 213000, Changzhou, China  
 Tel: +86-519-68788166 Email: [info@seraphim-energy.com](mailto:info@seraphim-energy.com)

### Electrical Characteristics

Module Type	SRP-535-BMA-HV		SRP-540-BMA-HV		SRP-545-BMA-HV		SRP-550-BMA-HV	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power at STC (Pmp)	535	402	540	406	545	409	550	414
Open Circuit Voltage (Voc)	49.40	46.09	49.50	46.18	49.60	46.32	49.70	46.40
Short Circuit Current (Isc)	13.70	11.08	13.81	11.16	13.90	11.23	14.00	11.32
Maximum Power Voltage (Vmp)	41.29	38.33	41.55	38.39	41.80	38.41	42.05	38.58
Maximum Power Current (Imp)	12.96	10.50	13.00	10.59	13.04	10.65	13.08	10.73
Module Efficiency at STC(ηm)	20.70		20.89		21.09		21.28	
Power Tolerance	(0, +4.99)							
Maximum System Voltage	1500V DC							
Maximum Series Fuse Rating	25 A							

STC: Irradiance 1000 W/m<sup>2</sup> module temperature 25°C AM=1.5  
Power measurement tolerance: +/-3%

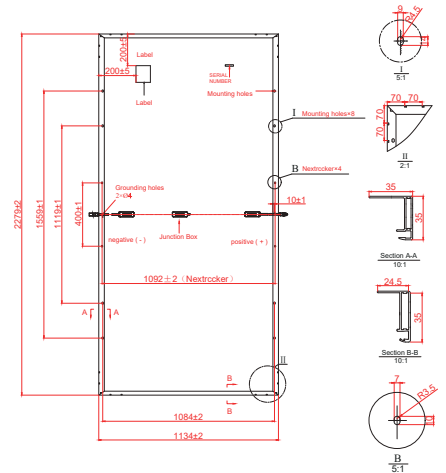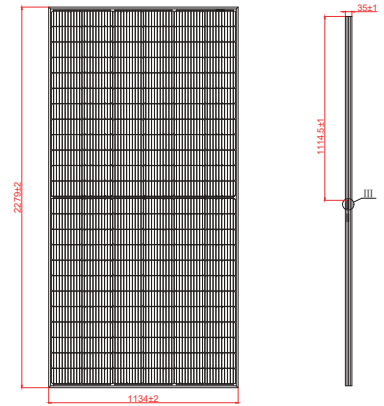



### Temperature Characteristics

Pmax Temperature Coefficient	-0.34 %/°C
Voc Temperature Coefficient	-0.26 %/°C
Isc Temperature Coefficient	+0.05 %/°C
Operating Temperature	-40 ~ +85 °C
Nominal Operating Cell Temperature(NOCT)	45±2 °C

### Mechanical Specifications

External Dimensions	2279x1134x35 mm
Weight	27 kg
Solar Cells	PERC Mono (144pcs)
Front Glass	3.2mm AR coating tempered glass, low iron
Frame	Anodized aluminium alloy
Junction Box	IP68, 3 diodes
Output Cables	4.0mm <sup>2</sup> , 250mm(+)/350mm(-) or Customized Length
Mechanical Load	Front side 5400Pa/ Rear side 2400Pa

### I-V Curve

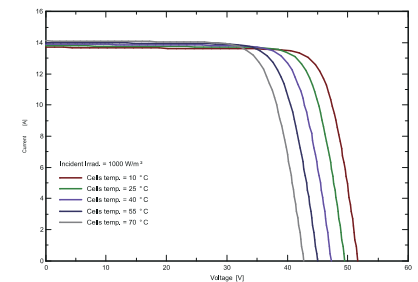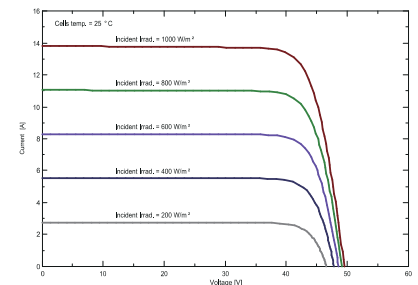

### Packing Configuration

	2279x1134x35 mm	
Container	20'GP	40'HQ
Pieces per Pallet	31+4*	31
Pallets per Container	4	20
Pieces per Container	140	620

\* 31+4 pieces per pallet is the special package which only suits for container transport.  
For details, please consult SERAPHIM.

